


## Features

- Max 250MHz frequency output
- Max 1.25GS/s sample rate, and 1 $\mu$ Hz frequency resolution
- Vertical Resolution :14 bits, max 1M arb waveform length
- Phase Noise: -85 dBc/Hz @1 Gz and offset at 10 kHz
- High-accuracy frequency counter integrated,
- 8 inch (800 × 600 pixels) multi-touch screen

## Applications

- Electronic Circuit Debugging
- Education and Training
- Circuit Testing
- Design and Manufacture
- Automobile Maintenance and Testing

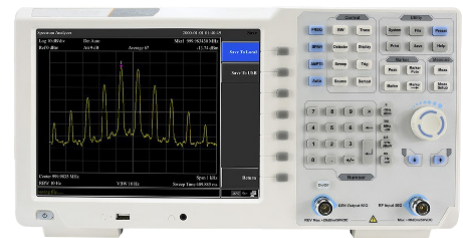

**Model A2255 Datasheet V1.0**  
**250 MHz Arbitrary Waveform Generator**



# Model A2255 Arbitrary Waveform Generator

# Model A2255

## Performance Specifications

Channel	2	
Frequency Output	250 MHz	
Sample Rate	1.25GSa/s	
Vertical Resolution	14 bits	
Waveform		
Standard Waveform	sine, square, pulse, ramp, noise, and harmonic	
Arbitrary Waveform	exponential rise, exponential fall, sin(x)/x, step wave, and others, total 152 built-in waveforms, and user-defined arbitrary waveform	
Frequency (resolution 1 $\mu$ Hz)		
Sine	1 $\mu$ Hz - 250MHz	
Square	1 $\mu$ Hz - 50MHz	
Pulse	1 $\mu$ Hz - 25MHz	
Ramp	1 $\mu$ Hz - 5MHz	
Harmonic	1 $\mu$ Hz - 125MHz	
Noise	120MHz (-3dB, typical)	
Arbitrary Waveform	built-in waveform: 1uHz - 15MHz user-defined waveform: 1uHz - 50MHz	
Accuracy	$\pm 1$ ppm, 0°C - 40°C	
Amplitude		
Into 50 $\Omega$ load	1mVpp - 10Vpp ( $\leq 40$ MHz); 1mVpp - 5Vpp ( $\leq 80$ MHz) 1mVpp - 2.5Vpp ( $\leq 120$ MHz); 1mVpp - 1Vpp ( $\leq 250$ MHz)	
Into open circuit, or high-Z	2mVpp - 20Vpp ( $\leq 40$ MHz); 2mVpp - 10Vpp ( $\leq 80$ MHz); 2mVpp - 5Vpp ( $\leq 120$ MHz); 2mVpp - 2Vpp ( $\leq 250$ MHz)	
Accuracy	$\pm(1\%$ of  setting  + 1mVpp) (typical, 1kHz sine, 0V offset)	
Resolution	1mV or 4 digits	
Load Impedance	50 $\Omega$ (typical)	
DC Offset	Range (50 $\Omega$ )	$\pm(5$ Vpk - Amplitude Vpp/2)
	Range (open circuit, high-Z)	$\pm(10$ Vpk - Amplitude Vpp/2)
	Accuracy	$\pm(1\%$ of  setting  + 1mV + Amplitude Vpp x 0.5%)
	Resolution	1mV or 4 digits
Sine Wave Spectrum Purity		
Harmonic Distortion (typical (0dB))	DC - 1MHz: <-65dBc 1MHz - 10MHz: <-60dBc 10MHz - 120MHz: <-50dBc 120MHz - 250MHz: <-45dBc	
Total Harmonic Distortion	< 0.05 %, 10 Hz to 20 kHz, 1 Vpp	
Spurious (non-harmonic) (typical (0dB))	$\leq 10$ MHz: <-70dBc >10MHz: <-70dBc + 6dB/ octave	



# Model A2255

## Model A2255 Arbitrary Waveform Generator

Phase Noise (typical (0 dBm, 10 kHz deviation))	10MHz: $\leq -110$ dBc/Hz
Square	
Rise / Fall Time	<5ns
Overshoot	<3%
Duty Cycle	50.0% (fixed)
Jitter (rms)	300ps + 100ppm
Pulse	
Pulse Width	12ns - 996875s
Rise / Fall Time	$\geq 7$ ns
Overshoot	<3%
Jitter (rms)	300ps + 100ppm
Ramp	
Linearity	$\leq 1\%$ of peak output (typical, 1kHz, 1 Vpp, 50% symmetry)
Symmetry	0% to 100%
Harmonic	
Harmonic Order	$\leq 16$
Harmonic Type	even, odd, all, user
Harmonic Amplitude	could be set for all the harmonics
Harmonic Phase	
Arbitrary	
Waveform Length	2 points - 1M points
Vertical Resolution	14 bits
Minimum Rise/Fall Time	<7ns
Jitter (rms)	3ns
Modulation	
Type	AM, FM, PM, PWM, FSK, 3FSK, 4FSK, PSK, OSK, ASK, BPSK, sweep, and burst
AM	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal / external
Modulating Waveform	sine, square, ramp, noise, and arbitrary
Depth	0.0% - 100.0%
Modulation Frequency	2 mHz - 100 kHz
FM	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal / external
Modulating waveform	sine, square, ramp, noise, and arbitrary
Modulating Frequency	2 mHz - 100 kHz
PM	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal / external



# Model A2255 Arbitrary Waveform Generator

# Model A2255

Modulating Waveform	sine, square, ramp, noise, and arbitrary
Phase Deviation	0° - 180°
Modulation Frequency	2 mHz - 100 kHz
PWM	
Carrier Waveform	pulse
Source	internal / external
Modulating Waveform	sine, square, ramp, noise, and arbitrary
Width Deviation	0 ~ minimum (pulse duty ratio, 100% - pulse duty ratio)
Modulating Frequency	2 mHz - 100 kHz
F2k / 3FSK / 4FSK	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal / external
Modulating Waveform	square with 50% duty cycle
Key Frequency	2 mHz - 1MHz
PSK	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal / external
Modulating Waveform	square with 50% duty cycle
Key Frequency	2 mHz - 1MHz
OSK	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal
Oscillation Time	square with 50% duty cycle
Key Frequency	2 mHz - 1MHz
ASK	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal / external
Modulating Waveform	square with 50% duty cycle
Key Frequency	2 mHz - 1MHz
BPSK	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Source	internal
Modulating Waveform	square with 50% duty cycle
Key Frequency	2 mHz - 1MHz
Sweep	
Carrier Waveform	sine, square, ramp, and arbitrary (except DC)
Type	linear, and log
Sweep Time	1 ms to 500s, ± 0.1%
Trigger Source	internal, external, and manual
Burst	
Carrier Waveform	sine, square, ramp, pulse, and arbitrary (except DC)



# Model A2255

## Model A2255 Arbitrary Waveform Generator

Burst Count	1 to 50,000 period, infinite, gating
Internal Period	10 ns - 500 s
Gated Source	external trigger
Frequency Counter	
Function	frequency period, +width, -width, +duty, and -duty
Frequency Range	100mHz - 200MHz
Frequency Resolution	7 digits
Input / Output	
Display	8" 800 x 600 pixels touch screen LCD
Type	frequency counter, external modulation input, external trigger input, external reference clock input / output
Communication Interface	USB Host, USB Device, and LAN

